




TTP-2610MT SERIES – Industrial Thermal Transfer Bar Code Printer **MORE VALUE, MORE FEATURES, HIGHER RELIABILITY**

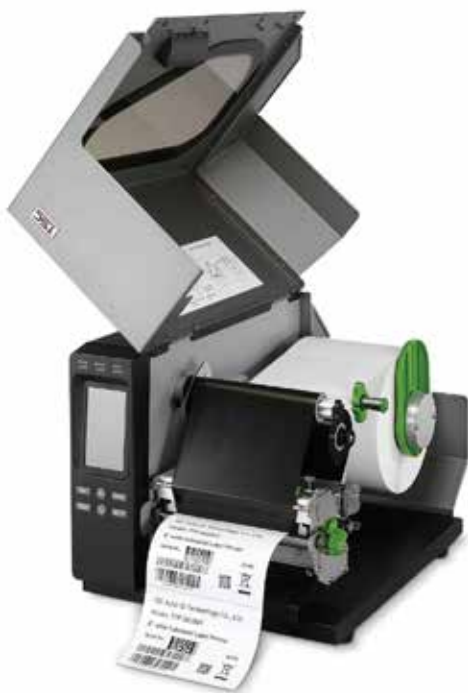

KEY FEATURES

- High quality die cast aluminum design
- "Thermal Smart Control"™ print technology produces clean, high quality barcodes
- 4.3" color LCD with 6-button menus and touch panel operation
- 203 dpi and 300 dpi models
- Ethernet, USB 2.0, USB Host, serial and parallel connectivity are standard
- 256 MB SDRAM, 512 MB Flash
- SD Flash card memory expands storage to 32 GB
- Powerful 32 bit 536 MHz RISC processor
- Auto TPH resolution switch detection
- Standard industry emulations right out of the box including Eltron® and Zebra® language support
- USB host for stand-alone or data entry at print site

APPLICATIONS

- Compliance Labeling For Shipping & Receiving
- Pallet Labeling
- Inventory Control Labeling
- Drum Labeling
- Warning Labels
- Custom Signage
- Brand Marketing Featuring Graphics, Logos & Texts
- Multiple-up Labels (two or three labels across)

TTP-2610MT SERIES – Industrial Thermal Transfer Bar Code Printer

PRINTER MODEL	TTP-2610MT
Resolution	• 8 dots/mm (203 DPI)
Printing method	• Thermal Transfer & Direct Thermal
Max. print speed	• 305 mm (12")/second
Max. print width	• 168 mm (6.61")
Max. print length	• 14,732 mm (580")
Enclosure	• Die-cast aluminum frame/Metal cover with large clear media view window
Physical dimension	• 355 mm (W) x 337 mm (H) x 520 mm (D) • 13.98" (W) x 13.27" (H) x 20.47" (D)
Weight	• 23 kg (50.71 lbs)
Label roll capacity	• 208.3 mm (8.2") OD
Ribbon	• 450 meter long, max. OD 81 mm, 1" core (Ink coated outside/inside)
Ribbon width	• 50.8 mm ~ 178 mm (2" ~ 7")
Processor	• 32-bit RISC CPU
Memory	• 512 MB Flash memory • 256 MB SDRAM • SD Flash memory card reader for Flash memory expansion, up to 32 GB
Interface	• RS-232 • Centronics • USB 2.0 • Internal Ethernet, 10/100 Mbps • USB host, for scanner or PC keyboard • GPIO (factory option) • Slot-in 802.11 a/b/g/n wireless (only for TTP-2610MT)(dealer option) • Bluetooth (user option)
Power	Internal universal switching power supply • Input: AC 100-240V, 3.0A, 50-60Hz • Output: DC 24V, 8.33A, 200W
LCD	• 16 bits Color, 480 x 272 pixels, with back lights, Resistive Touch Screen
Operation switch, button	• 1 power switch, 6 buttons (Menu, Pause, Feed, Up, Down, Select)
Sensors	• Transmissive gap sensor (position adjustable) • Black mark reflective sensor (position adjustable) • Ribbon encode & ribbon end sensor • Head open sensor
Real time clock	• Standard
Internal fonts	• 8 alpha-numeric bitmap fonts • Monotype Imaging® true type font engine with one CG Triumvirate Bold Condensed scalable font
Bar code	• 1D bar code Code 39, Code 93, Code 128UCC, Code 128 subsets A,B,C, Codabar, Interleave 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11 • 2D bar code PDF-417, Maxicode, DataMatrix, QR code, Aztec
Font and barcode rotation	• 0, 90, 180, 270 degree
Printer language	• TSPL-EZ (Compatible to EPL, ZPL, ZPL II)
Media type	• Continuous, die-cut, fan-fold, tag, notched, black mark (outside wound)
Media width	• 50.8 ~ 172.7 mm (2" ~ 6.8")
Media thickness	• 0.06 ~ 0.254 mm (2.36 ~ 10 mil)
Media core diameter	• 76.2 mm (3")
Label length	• 10 ~ 14,732 mm (0.39" ~ 580")
Environment condition	• Operation: 5 ~ 40°C, 25 ~ 85% non-condensing • Storage: -40 ~ 60°C, 10 ~ 90% non-condensing
Safety regulation	• FCC Class A, CE Class A, CCC
Environmental concern	• Comply with RoHS, WEEE
Accessories	• Windows labeling software CD disk • Quick start guide • USB cable • Power cord • Ribbon paper core
Limited warranty	• Printer: 2 years • Print head: 25 km (1 million inches) or 12 months which comes first • Platen: 50 km (2 million inches) or 12 months which comes first
Factory options	• GPIO interface
Dealer options	• Peel-off kit (include internal rewind & peel off module) • Heavy duty cutter (full cut) • 802.11 a/b/g/n wireless module (slot-in)(only for TTP-2610MT)
User options	• Bluetooth module (serial interface) • KP-200 Plus keyboard display unit • KU-007 Plus programmable smart keyboard



CORPORATE HEADQUARTERS

TSC Auto ID Technology Co., Ltd.
Tel: +886 2 2218 6789
E-mail: apac_sales@tscprinters.com

LI ZE PLANT

TSC Auto ID Technology Co., Ltd.
Tel: +886 3 990 6677
E-mail: apac_sales@tscprinters.com

AMERICAS

TSC Auto ID Technology America Inc.
Tel: +1 657 258 0808
E-mail: americas_sales@tscprinters.com

MEXICO

TSC Mexico Representative Office
Tel: +52 (33) 3165 7379
E-mail: americas_sales@tscprinters.com

BRAZIL

TSC Brazil Representative Office
Tel: +55 (11) 99597 8098
E-mail: americas_sales@tscprinters.com

EMEA

TSC Auto ID Technology EMEA GmbH
Tel: +49 (0) 8106 37979 00
E-mail: emea_sales@tscprinters.com

RUSSIA

TSC Auto ID Technology EMEA GmbH
Tel: +7 495 249 9017
E-mail: emea_sales@tscprinters.com

MIDDLE EAST

TSC Auto ID Technology ME Ltd, FZE
Tel: +971 4 2533 069
E-mail: emea_sales@tscprinters.com

ASIA PACIFIC





TSC Auto ID Technology Co., Ltd.
Tel: +886 2 2218 6789
E-mail: apac_sales@tscprinters.com

CHINA

Tianjin TSC Auto ID Technology Co., Ltd.
Tel: +86 22 5981 6661
E-mail: apac_sales@tscprinters.com

CONTACT US NOW TO SEE THEM IN ACTION OR FOR SAMPLES & COSTINGS



-  digital printers
-  thermal printers
-  weighing scales
-  labels & support

QLM Label Makers Sdn Bhd

No. 7, Jalan TPP 6/6, Taman Perindustrian, Puchong 6, 47100 Puchong Selangor
p +603 8062 7823 e malaysia@qlmgroup.com

Three-P Systems Sdn Bhd

No 13-1, 1st Floor, Jalan Mahkota Residence 1,
Bandar Mahkota Cheras, 43200 Cheras, Selangor.
p +603 9011 6866 e info@3psystems.my

qlm.com.my 3psystems.my